


FR4



Article G842  
Point Angle a

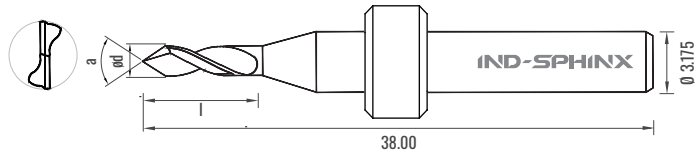

Article G843  
Point Angle a



Article G844  
Point Angle a

| Ø d DIAMETER | l FLUTE LENGTH | a mm |
|--------------|----------------|------|
| 0.75         | 2.10           | 30°  |
| 0.75         | 3.50           | 30°  |
| 0.75         | 2.10           | 60°  |
| 0.75         | 2.10           | 90°  |
| 0.75         | 3.60           | 90°  |
| 1.60         | 3.80           | 90°  |

On request : Inch / Special dimensions / Shank 3.00mm

**APPLICATION**

Used for isolation path cutting in prototype PCB for R&D and training institutions

Used for Engraving applications

**FEATURES & BENEFITS**

Efficient copper etching

Consistent track width

**PACKING**

10 tools per pack

50 tools per pack



QUALITY • PRECISION • CONSISTENCY



[www.indspinx.com](http://www.indspinx.com)  
[customerfocus@indspinx.com](mailto:customerfocus@indspinx.com)