


- IMS PCB Ceramic Layer
- FR4 High Tg ≥170
- FR4 Ceramic Fillers
- Halogen Free Laminates
- FR4 Normal Tg



- ØD 3.175
X681C
- ØD 6.00
X688C

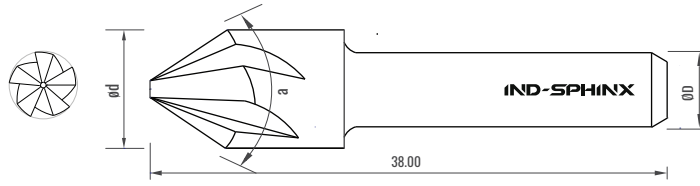

APPLICATION

Suitable for scoring and chamfering in IMS PCB's, High Tg material and laminate with fillers

Ød DIAMETER	mm	a POINT ANGLE
6.00 / 6.35		45°
6.00 / 6.35		60°
6.00 / 6.35		75°
6.00 / 6.35		90°
6.00 / 6.35		120°
6.00 / 6.35		140°

On request Inch / Special dimensions

FEATURES & BENEFITS

- Improved tool life
- High dimensional accuracy
- High Hardness

PACKING

- Single tool per pack
- 10 tools per pack
- 25 tools per pack



QUALITY • PRECISION • CONSISTENCY



www.indspinx.com
customerfocus@indspinx.com