



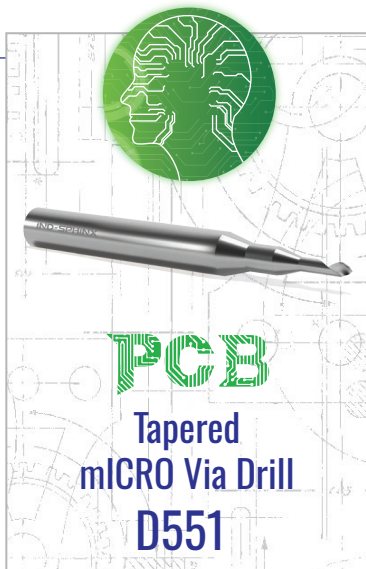

FR4

PTFE

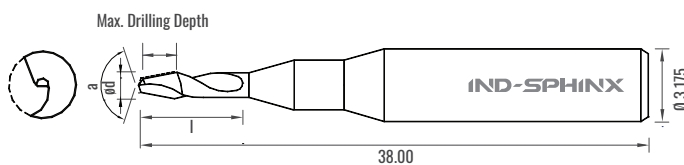

Point Angle a



Connecting of inner layers by drilling blind micro via

MAX. DRILLING DEPTH

For dia 0.075mm is 75µm  
For dia 0.40mm is 400µm

## APPLICATION

For making micro via holes  
(Blind holes)

Drilling of inner layers and foils

## FEATURES & BENEFITS

Excellent hole quality

High positional accuracy

## PACKING

10 tools per pack

50 tools per pack

| Ø d DIAMETER | I FLUTE LENGTH | mm |
|--------------|----------------|----|
| 0.075        | 0.50           |    |
| 0.100        | 0.50           |    |
| 0.120        | 0.50           |    |
| 0.150        | 0.50           |    |
| 0.200        | 1.00           |    |
| 0.250        | 1.00           |    |
| 0.300        | 2.50           |    |
| 0.400        | 2.50           |    |

On request : Inch / Special dimensions / Shank 3.00mm



QUALITY • PRECISION • CONSISTENCY



[www.indspinx.com](http://www.indspinx.com)  
[customerfocus@indspinx.com](mailto:customerfocus@indspinx.com)